


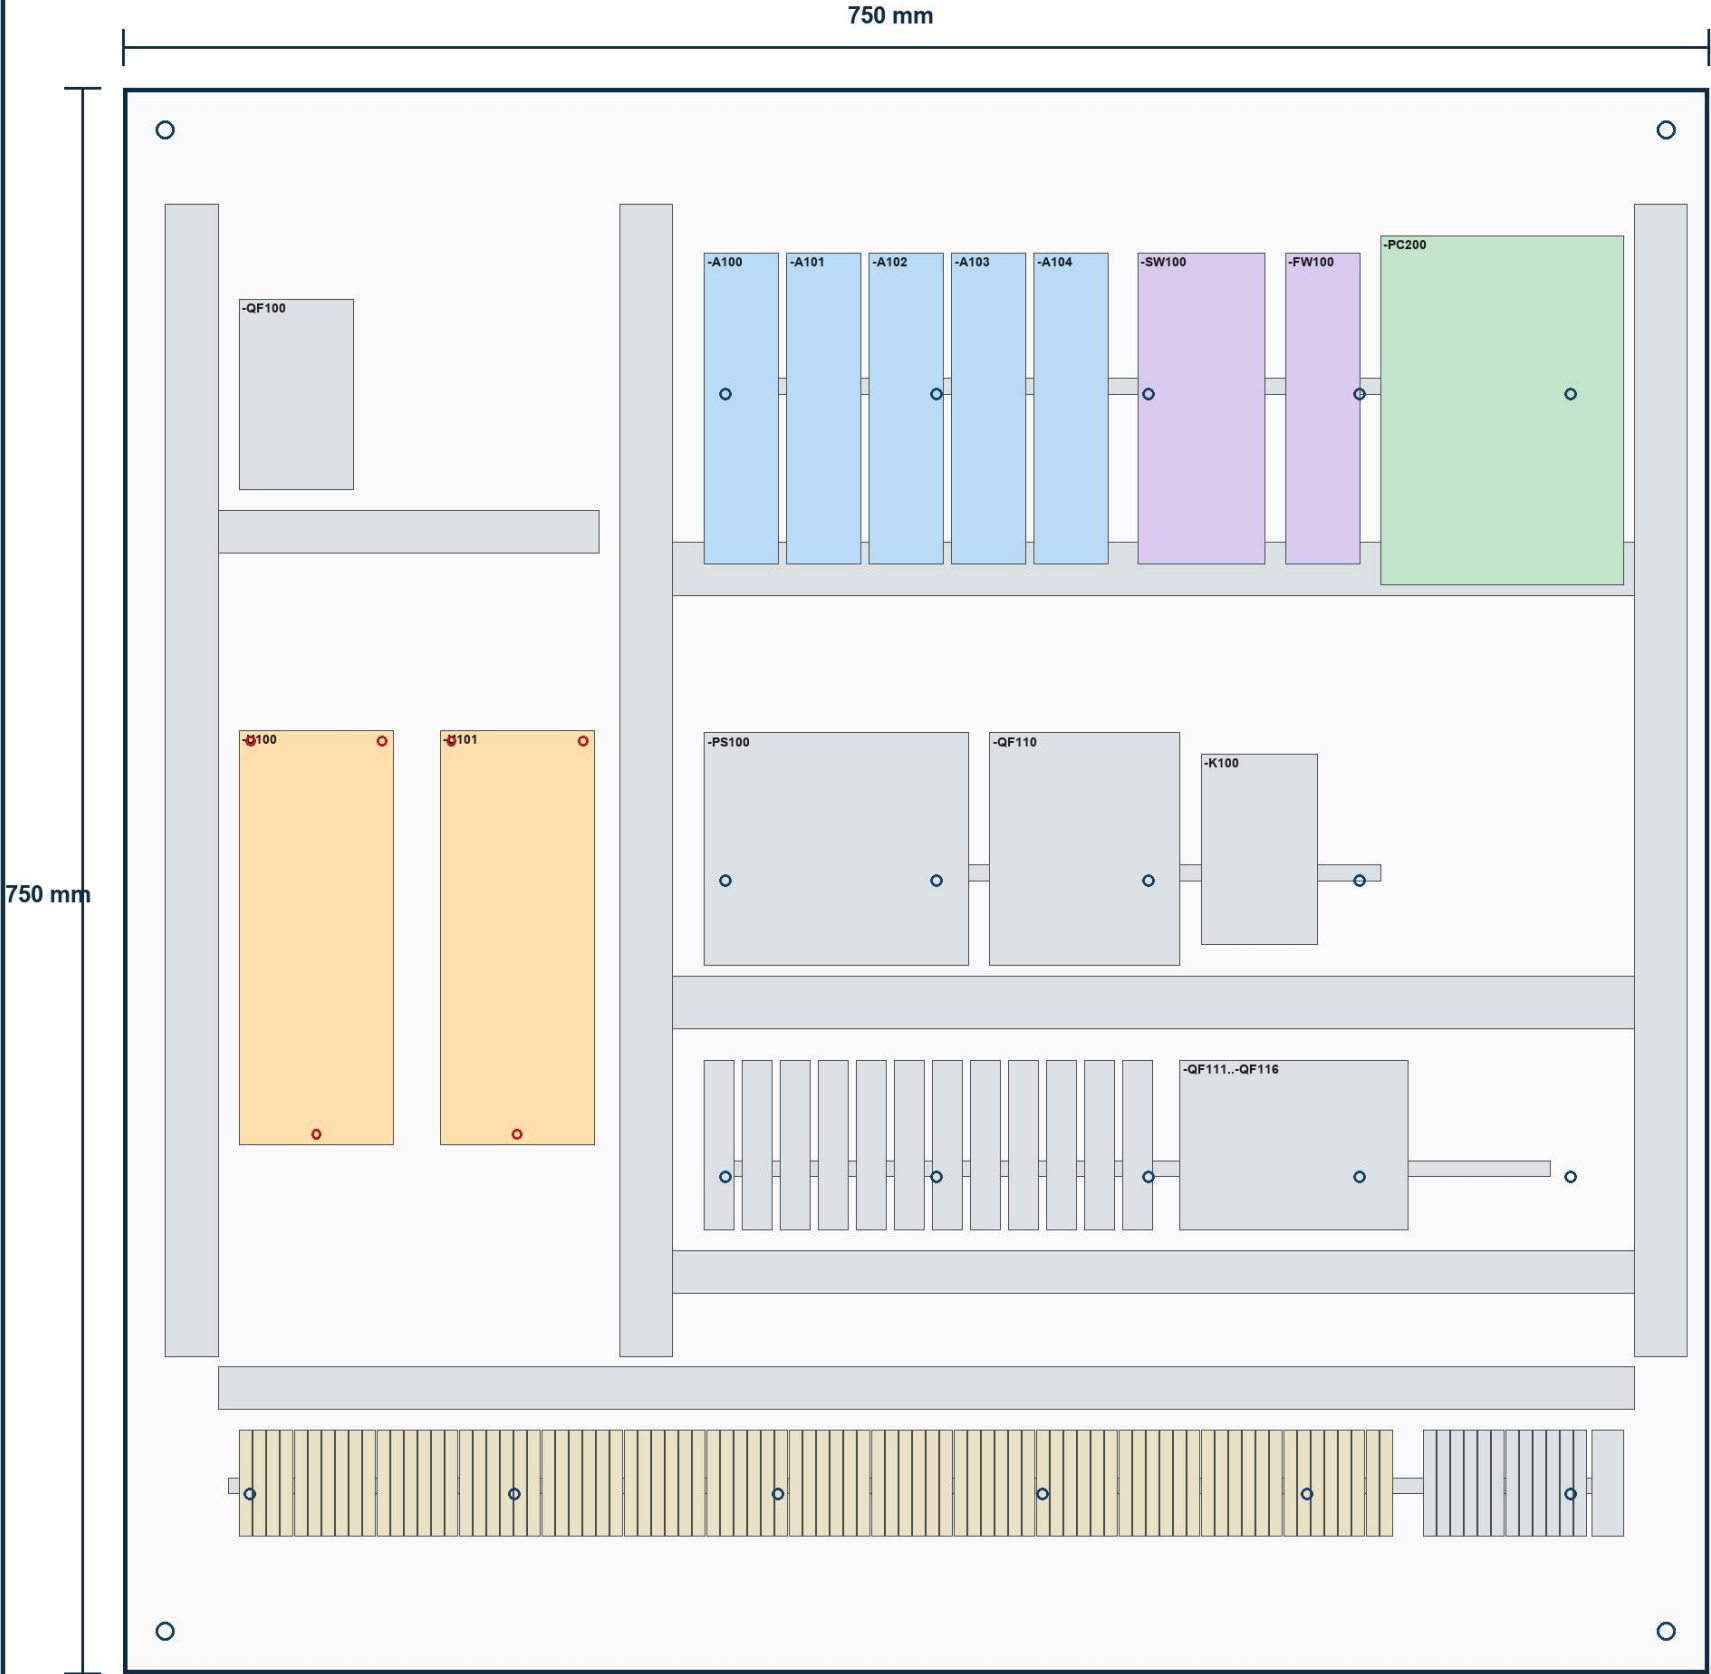

CONTROLLED DRILLING SUMMARY

Scheduled holes: 30

- U100: 3
- U101: 3
- Mounting plate interface: 4
- RA100-R1: 5
- RA101-R2: 4
- RA102-R3: 5
- RA103-R4: 6

CRITICAL BOUNDARY

Every hole in this drawing is provisional. G120C drilling uses the Siemens FSA table but the coordinate orientation shall be confirmed against order-number CAx. Plate/rail holes require selected enclosure and rail hardware. This drawing is not manufacturing authorization.

COORDINATE SYSTEM

Local origin (0,0) is the lower-left mounting-plate corner. Global enclosure coordinates add +25 mm in X and Y. All dimensions are millimetres.

OPEN INPUTS

- Selected enclosure and mounting-plate interface
- Rail/duct families and fixing hardware
- Drive CAx/drill orientation confirmation
- PE/bonding, duct fill, cable bend radii and thermal design

Hole ID	X local	Y local	Ø mm	Feature / status
MP-FIX-01	20	20	8.5	Mounting plate interface — PROVISIONAL
MP-FIX-02	730	20	8.5	Mounting plate interface — PROVISIONAL
MP-FIX-03	20	730	8.5	Mounting plate interface — PROVISIONAL
MP-FIX-04	730	730	8.5	Mounting plate interface — PROVISIONAL
RA100-R1-01	285	605	5.5	RA100-R1 — PROVISIONAL
RA100-R1-02	385	605	5.5	RA100-R1 — PROVISIONAL
RA100-R1-03	485	605	5.5	RA100-R1 — PROVISIONAL
RA100-R1-04	585	605	5.5	RA100-R1 — PROVISIONAL
RA100-R1-05	685	605	5.5	RA100-R1 — PROVISIONAL
RA101-R2-01	285	375	5.5	RA101-R2 — PROVISIONAL
RA101-R2-02	385	375	5.5	RA101-R2 — PROVISIONAL
RA101-R2-03	485	375	5.5	RA101-R2 — PROVISIONAL
RA101-R2-04	585	375	5.5	RA101-R2 — PROVISIONAL
RA102-R3-01	285	235	5.5	RA102-R3 — PROVISIONAL
RA102-R3-02	385	235	5.5	RA102-R3 — PROVISIONAL

Hole ID	X local	Y local	Ø mm	Feature / status
RA102-R3-03	485	235	5.5	RA102-R3 — PROVISIONAL
RA102-R3-04	585	235	5.5	RA102-R3 — PROVISIONAL
RA102-R3-05	685	235	5.5	RA102-R3 — PROVISIONAL
RA103-R4-01	60	85	5.5	RA103-R4 — PROVISIONAL
RA103-R4-02	185	85	5.5	RA103-R4 — PROVISIONAL
RA103-R4-03	310	85	5.5	RA103-R4 — PROVISIONAL
RA103-R4-04	435	85	5.5	RA103-R4 — PROVISIONAL
RA103-R4-05	560	85	5.5	RA103-R4 — PROVISIONAL
RA103-R4-06	685	85	5.5	RA103-R4 — PROVISIONAL
U100-MOUNT-01	60.35	441.0	4.5	-U100 — CAx CONFIRM
U100-MOUNT-02	122.65	441.0	4.5	-U100 — CAx CONFIRM
U100-MOUNT-03	91.5	255.0	4.5	-U100 — CAx CONFIRM
U101-MOUNT-01	155.35	441.0	4.5	-U101 — CAx CONFIRM
U101-MOUNT-02	217.65	441.0	4.5	-U101 — CAx CONFIRM
U101-MOUNT-03	186.5	255.0	4.5	-U101 — CAx CONFIRM